

Technical Data Sheet

BorDrill™ FLW Fluid Loss Additive

Description



Hexion's BorDrill™ FLW fluid loss additive is designed specifically for high pressure/high temperature (HP/HT) fluid loss control, clay particle inhibition, and borehole stabilization. It is formulated for superior performance in highly contaminated mud systems at elevated temperatures up to 204°C [400°F].

It is a water-soluble, extremely high molecular weight, powder resin.

Technical Advantages and Benefits

- Effective in a wide range of fresh water, seawater, saltwater, and contaminated systems
- Temperature stability up to 204°C [400°F]
- Does not increase the rheology of drilling fluid system
- Cost effective in a wide range of applications

Typical Properties

Property	Value	Unit
Appearance	Light purple free-flowing powder	
Flash Point	> 93°C [200°F]	
Particle Size 200 mesh	95	%
pH 10% Solution	9.7	
Recommended Dosage	3 - 7	lb/bbl
Solubility Water	100% Soluble	

API Fluid Loss Control

BorDrill™ FLW Fluid Loss Additive

<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/bordrill-flw>

Generated: July 4, 2022


Issue Date:

Revision: 1/1/1900 12:00:00 AM

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Affect of Chlorides on Fluid Loss

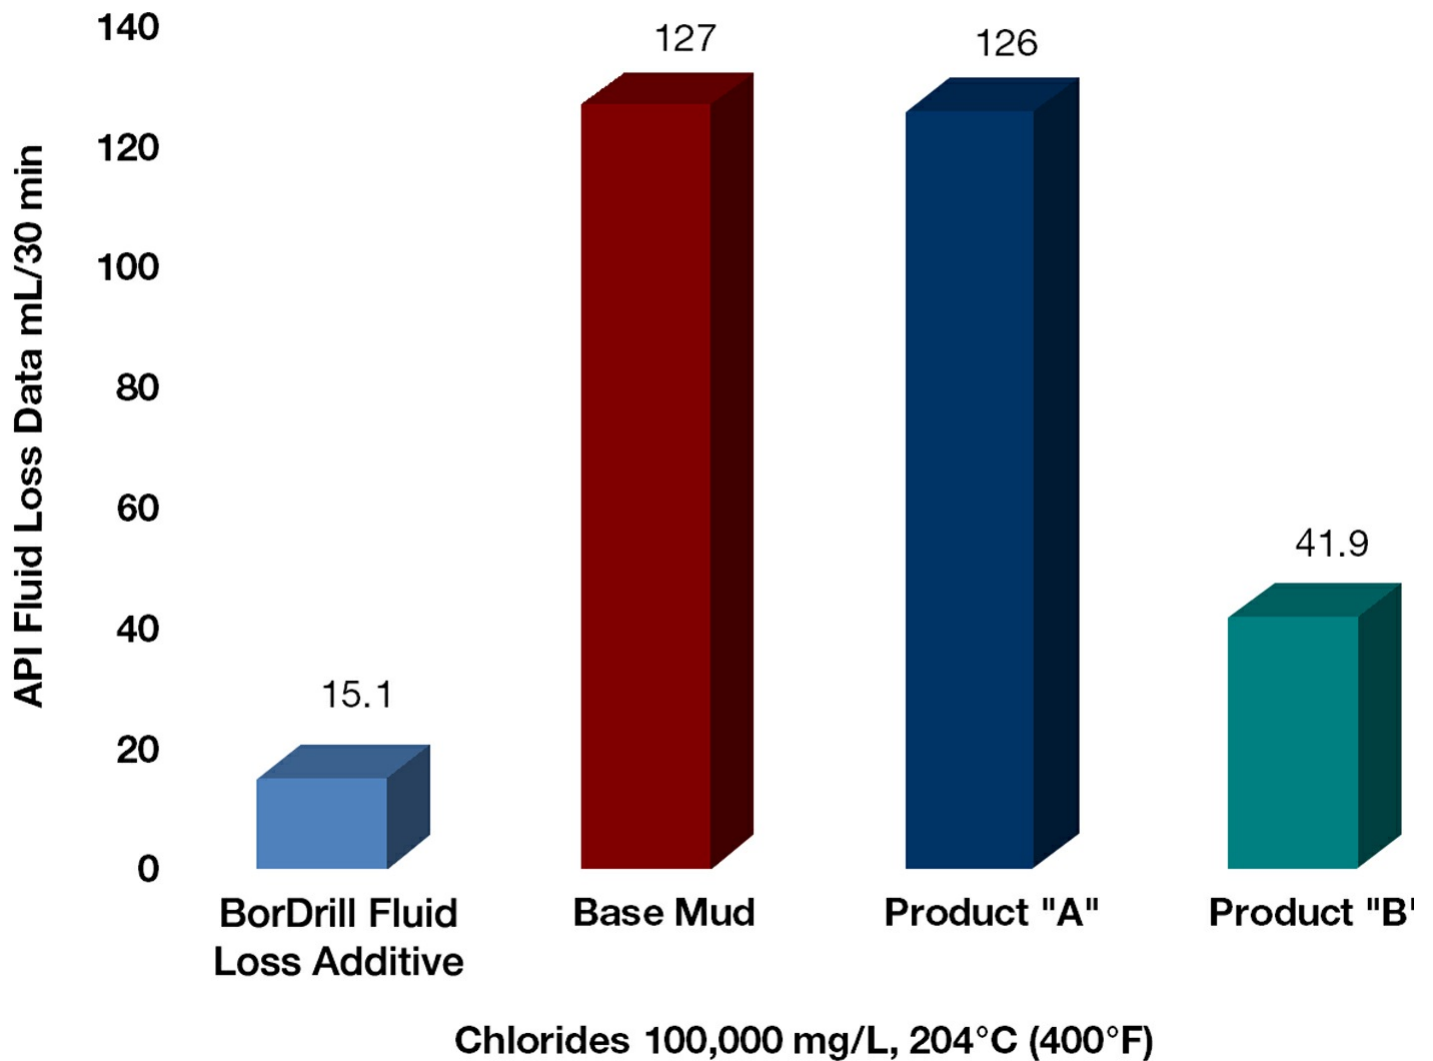

BorDrill™ FLW Fluid Loss Additive

<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/bordrill-flw>

Generated: July 4, 2022


Issue Date:

Revision: 1/1/1900 12:00:00 AM

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Affect of Calcium on Fluid Loss

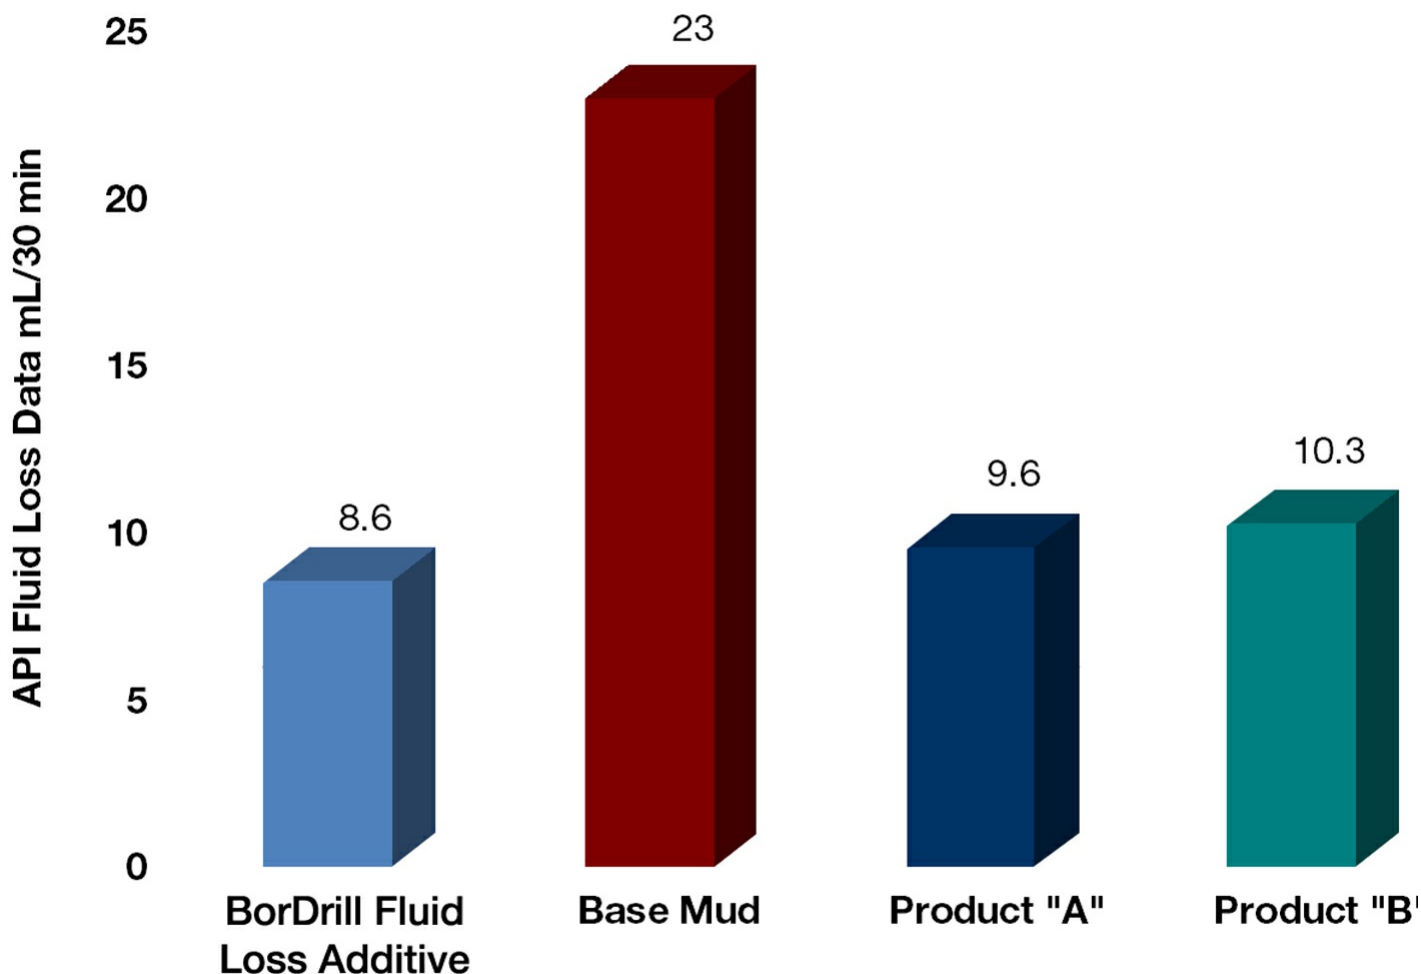

Chlorides 1,000 mg/L, Calcium 2,000 mg/L, 204°C (400°F)

Contamination Tolerance

Our BorDrill FLW fluid loss additive performs exceptionally well and tolerates various water-soluble salts used in oilfield applications. The monovalent salts like sodium and potassium have been found to be compatible at concentrations of 100,000 mg/L (NaCl). Divalent salts such as calcium and magnesium are tolerated (Ca++ 1,000 mg/L) as well. This tolerance and resistance provides the foundation for excellent API and HP/HT fluid loss control.

Contact Information

Hexion
Oilfield Technology Group
15306 Park Row
Houston, Texas 77084 USA
+1 281 646 2800
www.hexion.com/oilfield

Customer Service
+1 800 626 2116
oilg.customerservice@hexion.com

Technical Inquiries
oilg.customerservice@momentive.com

BorDrill™ FLW Fluid Loss Additive
<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/bordrill-flw>

Generated: July 4, 2022
Issue Date:
Revision: 1/1/1900 12:00:00 AM

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.