

Technical Data Sheet

XRT™ Ceramax™ V Proppants

Description



XRT™ Ceramax™ V proppants are a multi-purpose proppant that can be used in a wide variety of field applications. Use of the eXtreme Resin Technology (XRT) system to encase an intermediate density ceramic has yielded a proppant with high conductivity and resistance to cyclic stress.

Typical Applications

Fracture treatments:

- At closure stress up to 14,000 psi [97 MPa]
- At bottom-hole static temperatures of 175 - 450°F [79 - 232°C]
- That require proppant flowback prevention, especially under severe stress cycling
- When wellbore clean-out is a concern

Technical Advantages and Benefits

- Higher conductivity than uncoated ceramics
- Proppant flowback control even under extreme conditions utilizing Stress Bond™ technology
- Superior cyclic stress resistance
- Temperature stability for both extended pumping and storage times
- Increases near wellbore conductivity over uncoated ceramics

Typical Properties

XRT™ Ceramax™ V Proppants

<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/xrt-ceramax-v>

Generated: December 8, 2021

Issue Date:

Revision:

® and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Property	Value	Unit
API Mesh Size	-14+40	
Bulk Density	1.72 [14.4]	g/cm ³ [lb/gal]
Color	brown	
Compatibility	Fully compatible with most commonly used fracturing fluids, both water and oil-based systems. Testing with fluids prior to pumping is advised.	
Composition	resin coated ceramic	
Particle Size Distribution	meets or exceeds API RP 19C	
Physical State	solid granule	
Pipe Fill Factor	0.581 [0.0694]	cm ³ /g [gal/lb]
Resin Type	thermosetting, curable	
Solubility in Water, Brine & HCl	0.0	weight %
Solubility in HCl/HF acid, API RP 19C	≤ 3	weight %
Solubility In Oil	0.0	weight %
Specific gravity	3.01	
Specific Volume	0.332 [0.0398]	cm ³ /g [gal/lb]

Technical Considerations

- Grain-to-grain contact must occur and closure stress must be applied during the cure period for proper bonding
- Recommended lower temperature for use is 175°F [79°C]

Long-Term Conductivity

Stim-Lab, Inc. Consortium Long-Term Baseline Procedure

Proppant Concentration: 2 lb_m/ft² [9.8 kg/m²], Temperature: 300°F [149°C]

XRT™ Ceramax™ V Proppants

<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/xrt-ceramax-v>

Generated: December 8, 2021


Issue Date:

Revision:

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Closure Stress (psi)	2,000	4,000	6,000	8,000	10,000	12,000	14,000
Size	Conductivity (md-ft)						
-14 +40	6515	5661	4688	4238	3303	2506	1631

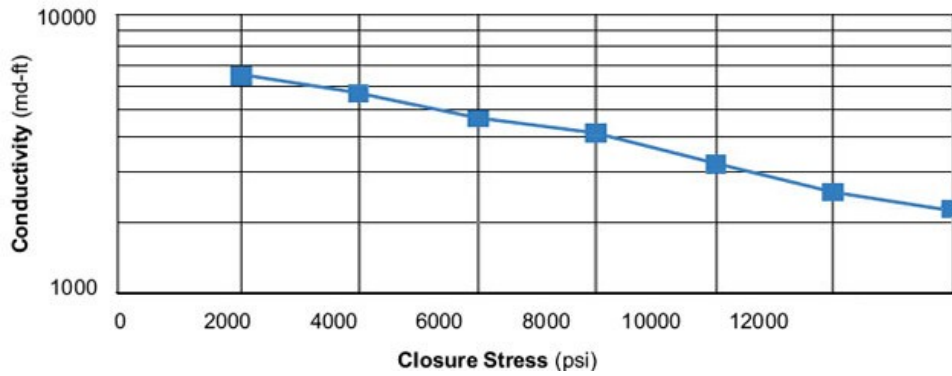

Contact Information

Hexion
Oilfield Technology Group
15366 Park Row
Houston, Texas 77084 USA
+1 281 646 2800
www.hexion.com/oilfield

Customer Service
+1 800 626 2116
otg.customerservice@hexion.com

Technical Inquiries
otg.customerservice@hexion.com