

# Technical Data Sheet

## EPON™ Resin 896

### Product Description

EPON™ Resin 896 is a solvent-free, epoxy resin designed for use with EPIKURE™ Curing Agent 3389 to give formulations with a high degree of chemical resistance. This epoxy resin has good crystallization resistance and low viscosity so it is easily handled. The cured system demonstrates superior mechanical strength and high heat deflection temperature (HDT) even without post curing at elevated temperatures.

It is important to note that only the combination of EPON® Resin 896 with EPIKURE™ Curing Agent 3389 provides the highest chemical resistance. Do not modify this system with additional diluents, or by adding solvents or modifiers, because this will decrease its performance. EPON Resin 896 and EPIKURE Curing Agent 3389 are designed to work together to provide low viscosity and superior chemical resistance for the application areas listed below.

EPON™ Resin 896 is a solvent-free, epoxy resin designed for use with EPIKURE™ Curing Agent 3389 to give formulations with a high degree of chemical resistance. This epoxy resin has good crystallization resistance and low viscosity so it is easily handled. The cured system demonstrates superior mechanical strength and high heat deflection temperature (HDT) even without post curing at elevated temperatures.

It is important to note that only the combination of EPON® Resin 896 with EPIKURE™ Curing Agent 3389 provides the highest chemical resistance. Do not modify this system with additional diluents, or by adding solvents or modifiers, because this will decrease its performance. EPON Resin 896 and EPIKURE Curing Agent 3389 are designed to work together to provide low viscosity and superior chemical resistance for the application areas listed below.

### Application Areas/Suggested Uses

- Secondary containment
- Industrial flooring
- Tank linings
- High chemical resistance applications for food processing<sup>1</sup>, food storage<sup>1</sup>, waste water, pulp & paper; as well as, liquid coatings for pipe and petrochemical areas

### Benefits

- Superior chemical resistance when used with EPON Resin 896
- Low viscosity
- High reactivity even down to 5 °C

### Sales Specifications

Property	Value	Unit	Test Method
Color	2 max	Gardner	ISO 4630
Epoxy Number	21.7 - 22.7	%	DIN 16945
Viscosity at 25°C	800 - 1100	cP	DIN 53015

### Typical Properties

Property	Value	Unit	Test Method
Density at 22°C	9.7 - 9.8	lb/gal	ASTMD742
Epoxide Equivalent Weight	189 - 199	g/eq	ASTMD1652

Physical Form Clear liquid

1) This product may be suitable for use in "indirect" food contact applications regulated by FDA 21CFR175.300. The FDA regulations must be

EPON Resin 896  
<https://hexioninternet-hexioninternet-slave.azurewebsites.net/en-US/product/epon-resin-896>

Generated: July 4, 2022  
 Issue Date:  
 Revision:


© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

consulted to determine the suitability of substances for use in specific "indirect" food contact applications. The responsibility for determining the overall compliance with applicable food additive/contact regulations is with the company manufacturing the final product and/or the person placing that product in contact with food.

## Chemical Resistance

Comparison of a standard epoxy system (EPIKOTE™ Resin 357 with EPIKURE™ Curing Agent F 205) and the low viscosity, chemical resistant system demonstrates the superior performance of EPON™ Resin 896 / EPIKURE™ Curing Agent 3389 after four weeks exposure to different chemicals (Graph 1).

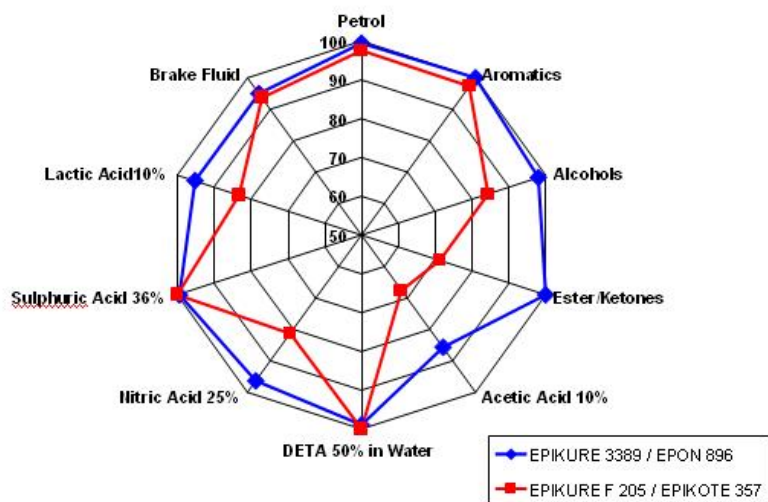

Graph 1: Shore D hardness after exposure of a standard epoxy system (in red) versus the low viscosity, chemical resistant epoxy system (in blue). Values were measured after four week immersion in the chemical. 100 = 100% of the original Shore D hardness. 50 = 50% of the original Shore D hardness.

## Safety, Storage & Handling

Please refer to the MSDS for the most current Safety and Handling information.

Please refer to the Hexion web site for Shelf Life and recommended Storage information.

Exposure to these materials should be minimized and avoided, if feasible, through the observance of proper precautions, use of appropriate engineering controls and proper personal protective clothing and equipment, and adherence to proper handling procedures. None of these materials should be used, stored, or transported until the handling precautions and recommendations as stated in the Material Safety Data Sheet (MSDS) for these and all other products being used are understood by all persons who will work with them.

Questions and requests for information on Hexion, Inc. ("Hexion") products should be directed to your Hexion sales representative, or the nearest Hexion sales office. Information and MSDSs on non-Hexion products should be obtained from the respective manufacturer.

## Packaging

Available in bulk and drum quantities.

## Contact Information

For product prices, availability, or order placement, please contact customer service:

[www.hexion.com/Contacts/](http://www.hexion.com/Contacts/)