


## Information Sheet

Cardura™ E10P Glycidyl Ester

# Acid Scavenger For Ester Base Stocks – Kinetics

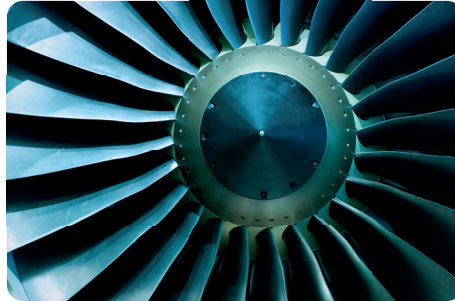

### High Performance Lubricants


### Hydrolysis

### Synthetic ester base stocks

Synthetic ester base stocks are one of the key Group V\* base oils used for a wide range of high-performance lubricant applications, such as refrigeration and air-conditioning, aviation turbines, automotive production and gear oils.

### The issue with hydrolysis

These synthetic esters are obtained by esterification of alcohols and carboxylic acids. The esterification reaction produces the ester and water. The reverse reaction, called hydrolysis, consumes water, generating acid and alcohol (see figure below).

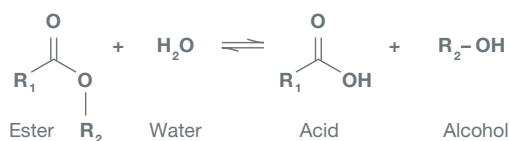

One of the basic requirements of an ester-based lubricant base stock is the ability to withstand hydrolysis. The rate of hydrolysis is influenced by several factors:

- The composition of the base oil
- Water concentration in the oil
- Oil temperature (higher temperatures speed up the hydrolysis reaction)
- Presence of acids (e.g. hydrolysis products), which act as catalysts
- Nature of additives, some of which support hydrolysis
- Presence of copper

### Effective Hydrolysis Reduction

### Cardura™ E10P acid scavenger


In order to enhance the life and performance of an ester-based lubricant, it is key to minimize the residual raw material acids from esterification and to avoid the formation of additional acids by hydrolysis. This prevents an autocatalytic or “snowball effect”, which would lead to losses of performance and to reduced durability. For this reason, lubricant producers specify the acid value as a measure of quality. A common method to reduce the acid value is adding a base. However, the addition of a base reduces the acid value, yet is not an effective way to prevent hydrolysis.

Cardura™ E10P glycidyl ester acts as an acid scavenger and enables base stock producers to actually reduce the initial acid concentration and to scavenge acids formed by hydrolysis. Cardura™ E10P acid scavenger effectively reduces the hydrolysis and the snowball effect.

### Cardura™ E10P Glycidyl Ester

### Cardura™ E10P glycidyl ester quick facts

- Epoxy equivalent weight: approx. 241 g/Eq-g
- Boiling range: 251 – 278 °C (5 – 95%)
- Viscosity (23 °C): 7.1 mPas
- High flame/flash point


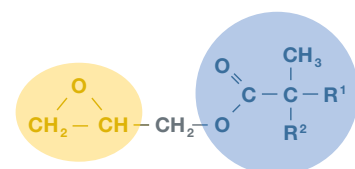


## Reaction of Acids with Cardura™ E10P Acid Scavenger

### Kinetics with different acids, with and without catalyst

2-Ethyl Hexanoic Acid (eq. mol. 110 °C)


Benzoic Acid (eq. mol. 110 °C)

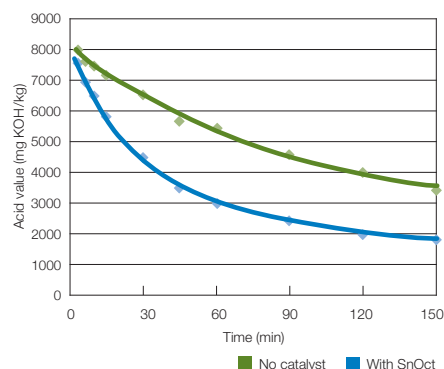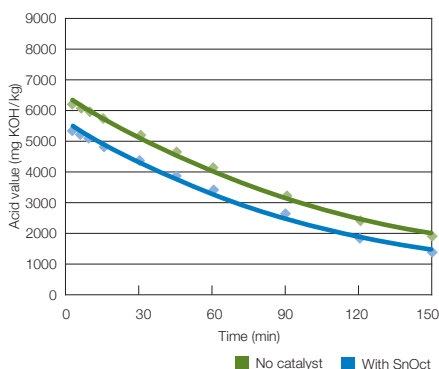

Different acids show diverse reaction kinetics with Cardura™ E10P acid scavenger. Catalysts can have a positive effect on the reaction rate. Cardura™ E10P acid scavenger enables base stock producers to reach very low acid value levels in a short period of time, which saves production time and energy. Furthermore, ester oils with a lower acid number are less prone to hydrolysis.

### Example of the effect of temperature on final acid value

The Acid: Cardura™ E10P glycidyl ester ratio is 1:6. All acid values were measured after 2 hours.

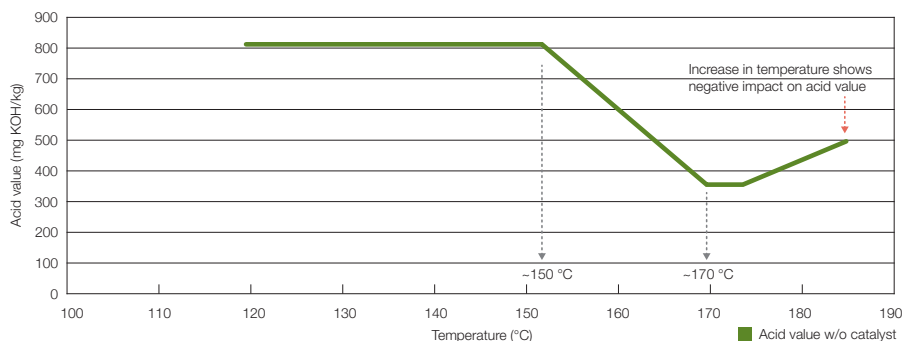

In order to maximize the efficiency of Cardura™ E10P glycidyl ester, the reaction temperature, the reaction time and the amount of Cardura™ E10P glycidyl ester used must be optimized. For example, the figure below shows the final acid value of a tri-oleate base oil with an initial acid value of 820 mg KOH/kg after treatment with a large excess of Cardura™ E10P glycidyl ester (6 times the acid concentration) or 2.1% weight. The final acid value, measured two hours later was found to be minimal at 360 mg KOH/kg when the reaction was performed at 170 °C in this case. Note that in other cases the optimum temperature might be up to 220 °C.

## Summary

### Cardura™ E10P glycidyl ester enables efficient synthetic ester base stock production

- Reduce base stock processing time and energy
- Reach very low acid values

### Enabling high performance lubricants

- Reduce additives
- Minimize corrosion
- Provide high performance and high stability
- Increase lubricant life and enhance protection of lubricated parts

Reach our Global Customer Service network at:

E-mail: [service@hexion.com](mailto:service@hexion.com) or enter a request on our website [www.hexion.com](http://www.hexion.com) under “contact us”



#### World Headquarters

180 East Broad Street  
Columbus, OH 43215-3799

**U.S., Canada and Latin America**  
+1 888 443 9466 / +1 614 986 2497

**Europe, Middle East, Africa and India**  
+31 10 3136 500

**China and Other Asia Pacific Countries**  
+86 21 3161 6680

Please refer to the literature code HXN-683 when contacting us.